



LEGEND			
HPG	High pressure gauge (Opt)		
LPG	Low pressure gauge		
MW	Water pressure gauge		
RM	Manual water filling cap		
VSC	Water drain valve		
SFAF	Free cooling manual air vent		
VSCF	Free cooling water drain valve		
PD	Display cover protection		
ATV	Rubber type antivibrant mounting (Opt)		

LIFTING AND CARRIAGE PRECAUTIONS

- Check the weight on the CE label to select appropriate lift equipment .
- Before lifting the unit make sure that the external panel is firmly fixed in place.
- To use only lifting points provided.
- The chains or slings must be of equal length.
- To use a spread-bar to avoid damage to the unit.
- The movement must be performed with caution and avoid abrupt movements.
- Never move the unit on rollers.

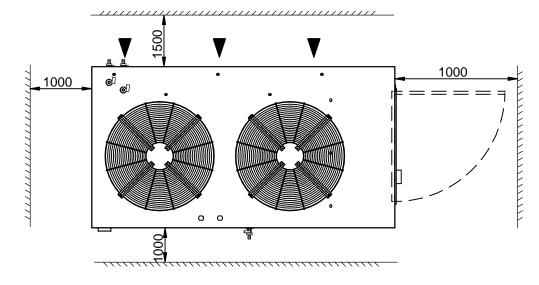

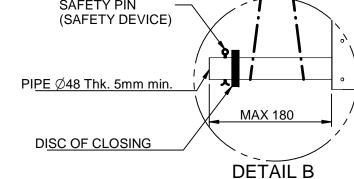

MOD.	EMPTY	OPERATING	HYDRAULIC
	WEIGHT	WEIGHT	CONNECTIONS
ENRF.022	460 kg	745 kg	1" 1/2 BSP F
ENRF.030	470 kg	755 kg	1" 1/2 BSP F

Dis.to-Drawn Scala-Scale N₽ezzi Data-Date 09/06/14 M. M. Peso-Weight Kg. Materiali-Materials Denominazione-Denomination DIS.-DRAW N. DIM-ENRF-022ST01 WATER CHILLERS mod. ENRF.022÷030 04-M.M.-05/05/20 Rev. Overall dimension - Lift Instruction PROGRAM.N. REFRIGERANT R410A / R32 / R454B